

WHERE PRECISION MEETS PRODUCTIVITY



imagePROGRAF TX-3200 MFP Z36

Canon

imagePROGRAF TX Series

EFFICIENCY

imagePROGRAF TX-3200

36"
printer

Up to
199
D-size
prints/hour

Up to
2
rolls



imagePROGRAF TX-3200 MFP Z36

Scan up to
13 ips B/W
6 ips Colour

Scan up to
1200 dpi

15.6"
Controller



imagePROGRAF TX-4200

44"
printer

Up to
3.3
D-size
prints/min

Up to
2
rolls



imagePROGRAF TX-4200 MFP Z36

Scan up to
13 ips B/W
6 ips Colour

Scan up to
1200 dpi

15.6"
Controller



STREAMLINE AND OPTIMIZE WORKFLOWS

With the capability to print both monochrome line drawings and eye-catching full-Colour posters, the imagePROGRAF TX large-format printer series is designed with production and versatility in mind within the aqueous inkjet market.

Key Features:

- **LUCIA TD 5-Colour Pigment Ink System**—the Magenta ink and improved line clarity help produce detailed lines and sharp text for CAD designs, signage, and more.
- **Intelligent Media Handling** offers automatic media feeding and media type/length/width detection for enhanced operation that is approximately 34 percent faster than previous generations.
- **Optional Multifunction Roll Unit** acts as a dual-roll unit or a take-up reel for continuous production printing.
- **Environmentally Conscious**—EPEAT® Gold and Energy Star® registered.



ARCHITECTURE



ENGINEERING



CONSTRUCTION



MANUFACTURING
DESIGN



DISTRIBUTION
SERVICES



TRANSPORTATION
SERVICES



GOVERNMENT
AGENCIES



CORPORATE
SPACES



PROFESSIONAL
PRINT SHOPS



HIGHER
EDUCATION/
UNIVERSITIES

Print with more confidence knowing Canon's patented technology and advanced security features are on the job.

LUCIA TD Magenta Pigment Ink

With newly developed magenta ink, the imagePROGRAF TX Series is designed to deliver outstanding red Colour reproduction suitable for a wide range of markets and applications. The use of pigment ink for all Colours helps to ensure prints are resistant to fading, making them ideal for poster output, but also provides water resistance for outdoor prints such as technical documents and line drawings.

Improved Line Clarity

New image processing improvements and LUCIA TD ink help to enhance CAD drawings, blueprints, AEC documentation, and poster reproductions with a large Colour gamut and improved text and line quality. This makes output more crisp, defined, and clear.

Colour Calibration

Now available in the imagePROGRAF TX Series, the ability to calibrate your printer helps ensure your output is Colour consistent over time and across multiple TX-3200/4200 devices.

Speed*

At up to 3.3 D-size prints per minute and with quicker media loading by approximately 34 percent, these TX printers are faster than the previous models.

Ease of Use

The imagePROGRAF TX Series has been built with production and efficiency in mind with a compact design, semi-translucent ink tank and media covers, an intuitive user interface screen, end-user installable printheads, maintenance cartridges, hot-swap ink tanks, and more! The user interface screen displays the ink and sub-ink tank levels, media indicator levels, and other setting prompts all on the home screen!

Intelligent Media Handling

Once the media is loaded into the imagePROGRAF TX Series, the printer will automatically find the leading edge and feed the media. From there, the imagePROGRAF TX Series will automatically determine the media type, length, and width, which will be shown on the display panel.

Z36 Scanner

Workflow is effortless and consistent with Canon's integration of the scanner with the imagePROGRAF TX Series. Similar to the previous model, the 36" lightweight Z36 scanner is positioned on top of the device, providing a compact, all-in-one solution for ease of use.

- Scan monochrome documents at up to 13" per second and Colour documents at up to 6" per second
- 15.6" Controller
- Scan up to 1200 dpi

Optional Multifunction Roll Unit

The optional Multifunction Roll System can be used in two different ways.


- Second media roll unit
- Take-up reel

Security Features

The imagePROGRAF TX Series large format printers come equipped with security features designed to help protect confidential information. Features include PIN Printing, self-encrypting hard drive, capabilities to disable the USB port, ethernet port, USB direct thumb drive, and more to help ensure peace of mind for the privacy of your documentation.

Environmentally Conscious

Currently registered as EPEAT® Gold—a first in the imagePROGRAF TX Series— and as ENERGY STAR® certified, these large format printers are replacing EPS packaging materials with cardboard packaging and helping to reduce power consumption.

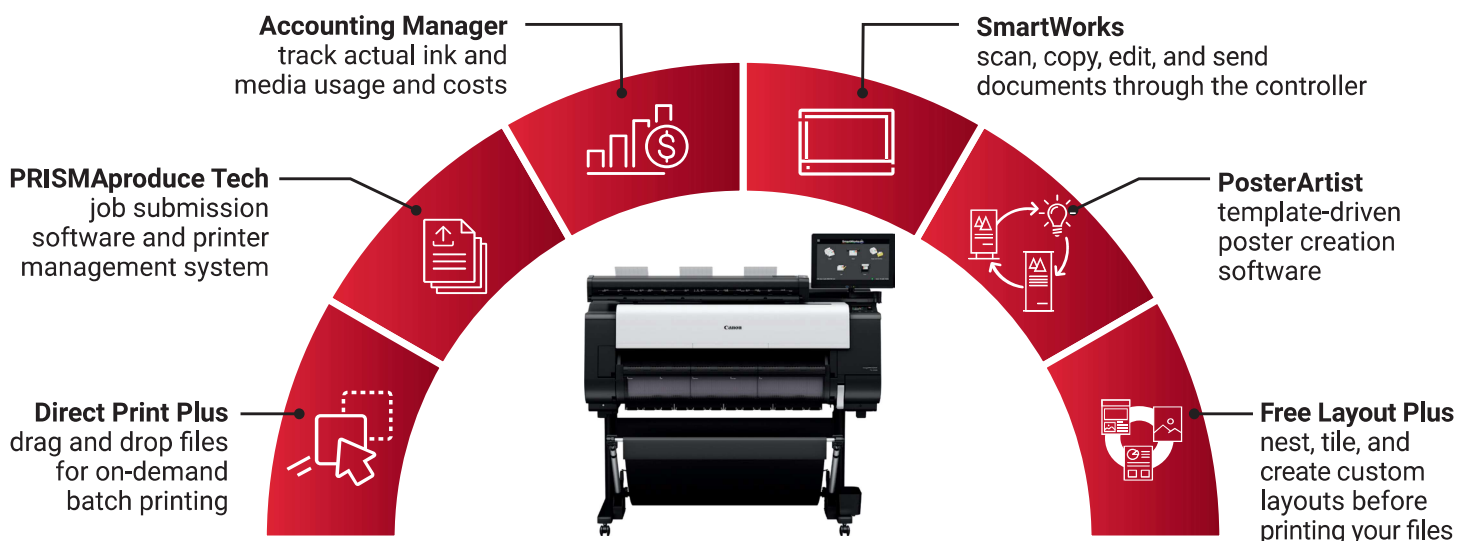

Printer Specifications

imagePROGRAF TX-3200/4200 | imagePROGRAF TX-3200/4200 MFP Z36

Printhead PF-06
Technology FINE (Photolithography Inkjet Nozzle Engineering)
Print Resolution (Max.) 2400 x 1200 dpi
Line Accuracy¹ ±0.1% or Less
Minimum Line Weight² 0.02 mm
Number of Nozzles Matte Black: 5,120 Nozzles Other Colours: 2,560 Nozzles per Colour
Droplet Size 5 Picoliter
Nozzle Pitch (Head Resolution) 1200 dpi x Two Rows
Ink Type Pigment: Matte Black (MBK), Cyan (C), Magenta (M), Yellow (Y), Black (BK)
Ink Tank Shipped with Printer: TX-3200: 160 ml C/Y/M/BK; 330 ml MBK TX-4200: 330 ml MBK/BK/C/Y/M Replacement: M: PFI-111 (160 ml)/PFI-311 (330 ml)/PFI-711 (700 ml), MBK/BK/C/Y: PFI-110 (160 ml)/PFI-310 (330 ml)/PFI-710 (700 ml)
Ink Supply Method Tubing System with Sub-tanks for Continuous Ink Supply
Nozzle Recovery System Non-firing Nozzle Detection and Compensation
Printer Controller L-COA PRO
Printer RAM 128 GB (Virtual), 2 GB (Physical)
Hard Drive 500 GB (Encrypted)
Media Feed Roll Feed: One Roll, Front-loading, Front Output
Media Width TX-3200 Roll Feed: 6"-36" (152 mm - 917 mm) Cut Sheet: 6"-36" (152 mm - 917 mm) TX-4200 Roll Feed: 6"-44" (152 mm - 1118 mm) Cut Sheet: 6"-44" (152 mm - 1118 mm)
Printable Margins Roll Feed: All Sides: 0.12" (3 mm) or 0" for Borderless
Maximum Print Length (Single Page)³ Roll Feed: 59' (18 m) Cut Sheet: 63" (1.6 m)
Borderless Printing Widths (Roll Media Only) TX-3200 Custom Roll Width 6" - 36" with Micro Margin Technology TX-4200 Custom Roll Width 6" - 44" with Micro Margin Technology
Media Cutter Automatic horizontal rotary cutter
Media Thickness 0.07 mm - 0.8 mm
Media Core Sizes 2" with 3" Core Adapters Included
Maximum Roll Outer Diameter 6.7" (170 mm)
Media Output Options TX Stacker, Multipositional Catch Basket

Printing Software Utilities Accounting Manager, Canon Print Service, Canon Production Printing (CPP) Driver Select, Canon Production Printing (CPP) PRISMA Tech Suite, Device Management Console, Direct Print Plus, Free Layout Plus, imagePROGRAF Printer Driver for Windows®/Mac®, Media Configuration Tool, PosterArtist, Optimized Driver for AutoCAD, Quick Utility Toolbox, Canon PRINT Inkjet/SELPHY
--

Operating System Windows 7 (32/64-bit), Windows 8.1 (32/64-bit), Windows 10 (32/64-bit), Windows 11 (64-bit), Windows Server 2008R2, 2012, 2012R2, 2016, 2019, 2022 (64-bit), MacOS v10.15.7- MacOS 14
Print Language SGRaster, HP-GL/2, HP RTL, PDF, JPEG, CALS G4
Interface USB B Port: Hi-Speed USB (12 Mbit/sec, 480 Mbit/sec) USB A Port: USB thumb drive Gigabit Ethernet: IEEE 802.3u/ab/x (100/1000Base-T, Full Duplex), SNMP, HTTP, TCP/IP (IPv4/IPv6), FTP Wi-Fi: IEEE 802.11n/g/b
Acoustic Noise Operation: 51 dB (A) or Less Standby: 35 dB (A) or Less Acoustic Power: Approx 6.9Bels
Power Supply AC 100 - 240 V (50 - 60 Hz)
Power Consumption Maximum: 115 W or Less Standby: 2.0 W or Less Power Off: 0.3 W or Less

Certifications International ENERGY STAR® Program (WW), TUV, CB, EPEAT Gold®
--

Operational Environment Temperature: 59°F - 86°F (15°C - 30°C) Relative Humidity: 10 - 80% (No Condensation)

Printer Dimensions (W x D x H) and Weight TX-3200 With Basket Open: 54.7" x 38.7" x 46"; 227 lb. (Approx.) With Basket Closed: 54.7" x 30.2" x 46"; 227 lb. (Approx.) With Stacker Opened: 54.7" x 47" x 46"; 295 lb. (Approx.) With Stacker Closed: 54.7" x 45" x 46"; 295 lb. (Approx.) TX-4200 With Basket Open: 62.7" x 38.7" x 46"; 247 lb. (Approx.) With Basket Closed: 62.7" x 30.2" x 46"; 247 lb. (Approx.) With Stacker Opened: 62.7" x 46.8" x 46"; 317 lb (Approx.) With Stacker Closed: 62.7" x 44.2" x 46"; 317 lb. (Approx.)

Package Dimensions (W x D x H) and Weight TX-3200 Printer (Main Unit with Stand and Pallet): 64" x 36" x 40.7"; 346 lb. (Approx.) Basket: 56.1" x 21.9" x 8.4"; 20 lb. (Approx.) Stacker: 50" x 36" x 12"; 57 lb. (Approx.) Roll Unit: 60" x 23" x 19"; 68 lb. (Approx.) TX-4200 Printer (Main Unit with Stand and Pallet): 71.7" x 36" x 41"; 361.6 lb. (Approx.) Basket: 56.1" x 21.9" x 8.4"; 20 lb. (Approx.) Stacker: 57.6" x 35.7" x 11.5"; 64 lb. (Approx.) Roll Unit: 68" x 23" x 19"; 75 lb. (Approx.)
--

Options • Multifunction Roll System (TX-3200 RU-32; TX-4200 RU-42) • 2"/3" Roll Holder Set (TX-3200 RH2-34; TX-4200 RH2-46)
--

User-Replaceable Items • Ink Tank (PFI-110/111, PFI-310/311, PFI-710/711) • Printhead (PF-06) • Maintenance Cartridge (MC-30) • Cutter Blade (CT-07)

What's In The Box? Includes Main Unit, TX Stacker or Multi-Positional Catch Basket, Stand, (1)Printhead, Starter Ink Tank Set, (1) Maintenance Cartridge (Installed), 2" Roll Holder with 3" Adapters, Installation Guide, User Registration Card, Printer Warranty Statement, Printhead Warranty Statement, Call Center Notice, Media Compatibility Flyer, PosterArtist Web Notice Flyer, iWR Service Terms Leaflet, Safety and Environmental Information, USB port (High Speed), Power Cable & Screw, Gigabit Ethernet (Built-In)

Z36 Scanner Specifications

Scan Speed⁵ • 24-bit Colour @ 200 dpi: 3" (Per Second) • 8-bit Grayscale and Monochrome @ 200 dpi: 13" (Per Second)

Copy Speed 24-bit Colour @ 200 dpi: 6" (Per Second)

Colour Space sRGB

Maximum Resolution 1200 dpi (Optical)

Scan Accuracy⁶ +/- 0.1% : +/- 1 pixel
--

Maximum Scan Width/Maximum Media Width 36"/38"
--

Maximum Scan Length 164' (PDF); 315" (JPEG); 598" (TIFF)
--

Maximum Media Thickness 0.003" - 0.04" (0.07 mm - 1.0 mm)

Digital Imaging Technology Contact Image Sensor (CIS) Technology (SingleSensor Assembly) • 24-bit RGB • 16-bit grayscale image capture • Panchromatic monochrome and black and white • Bi-directional extra long-life LED light system for optimum object illumination and instant-on scanning capability

Included Software SmartWorks MFP Scan-to-Copy/File/Email with Real-time Image Viewer; supports TIFF, JPEG, and PDF
--

Operating System Windows 11 Enterprise LTSC (x64)

Scanner Interface Kit 3x USB 3.2 and 1x USB 2.0 rear and 1x USB 3.2 front, all type A

Operating Environments 10°C - 35°C, 10 - 90% RH, Non-condensing

External Power Supply 100 - 240 VAC Autosensing +/- 10%, 50 - 60 Hz

Scanner Power Consumption • Controller Power: 35 W • Sleep: 0.2 W • Idle: 12.4 W • Scanning Colour/Grayscale at 200 dpi: 22.7 W/23.3 W

Compliances ENERGY STAR®, CB(62368-1), CE, FCC(EMC), CuI/UL, CCC, NOM-019, EAC, C-TICK, VCCI, BIS, EMC +LOA, UL AR, WEEE, REACH, RoHS, EU - Tier 3 of Lot 6

Scanner Package Dimensions (W x D x H) and Weight (With Stand, Pallet, and Scanner) 50" x 17" x 19.5", 75 lb. (Approx.)
--

What's In The Box? Z36 Scanner with Power Cord, USB 3.0 Cable (2 m), 15.6" System Controller, 3:1 Trident Power Cord, Power Supply, Mount for Printer and System Controller, (2) Paper Edge Guides, (3) Document Return Guides, Calibration target, Assembly and Start Up Guide, 3:1 Trident Power Cord

³3 ANSI D prints/minute speed measured after first print in Fast Q5 mode, using plain paper. Print speed is based on internal testing. Print speed may vary depending on the number of copies selected, as well as on the settings for size, type, and orientation of paper.

⁴All speeds measured using plain paper, Fast Q5 mode. The 199 ANSI D prints/hour is measured from when the first print begins printing. Print speed is based on internal testing. Print speed may vary depending on the number of copies selected, as well as on the settings for size, type, and orientation of paper.

¹Line accuracy repeatability is guaranteed after a user performs the necessary adjustment and under the same environmental conditions. Applies to media for line drawing (Plain Paper, Coated Paper, CAD Translucent Matte Film, and CAD Tracing Paper) only.

²Theoretical value based on data resolution.

³The maximum printable length varies depending on the application, OS, and RIP used.

⁴Wireless printing requires a working network with wireless 802.11b/g or 802.11n capability. Wireless performance may vary based on terrain and distance between the printer and wireless network clients.

⁵The scan rate is proportional across the full range of resolutions supported by the scanner. Actual scan times will depend on the host system performance. Quoted top speeds may be limited by the effective bandwidth of the USB 2 and is not guaranteed for all media types.

⁶The quoted scan accuracy may vary depending on the operating environment and the thickness of the media.

Note: The imagePROGRAF TX Series MFP Z36 systems contain multiple components, some of which are manufactured by third parties. To the extent that such third-party offerings come with limited warranties, such limited warranties are hereby passed to the purchaser, and Canon shall have no obligation or any liability with respect to such third-party offerings.



canon.ca